


S Type Drop Cable Clamp, ABS Body and 304 Stainless Steel Hook, UV Resistance

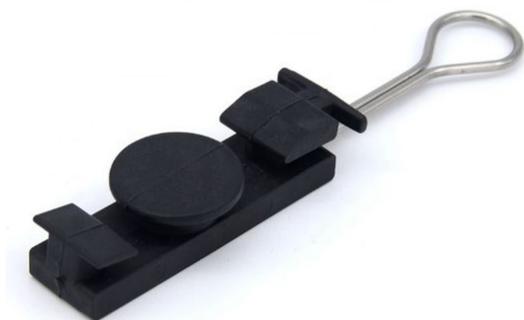

Applications

FTTH Drop Cable Clamp is designed to tension, anchor and support flat/round fiber optical cable with messenger or telephone drop cable with messenger on dead-end or intermediate routes during last mile FTTH line network installations.


Installation

Insert the cable messenger in the round route of the clamp to help to secure it as tightly as possible and then attach the clamp on drop cable hook or bracket.

General Specification

Body Material	ABS (UV Resistance)
Ring Hook Material	Stainless Steel 201
Size	137*20*15 mm Nominal
Hook Diameter	2.5mm
Compatible Cable Type	Drop Fiber Optic Cables with Messenger Telephone Cables with Messenger
Tensile Strength	1,500N
Operation Temperature	-20C to 60C

Dimension

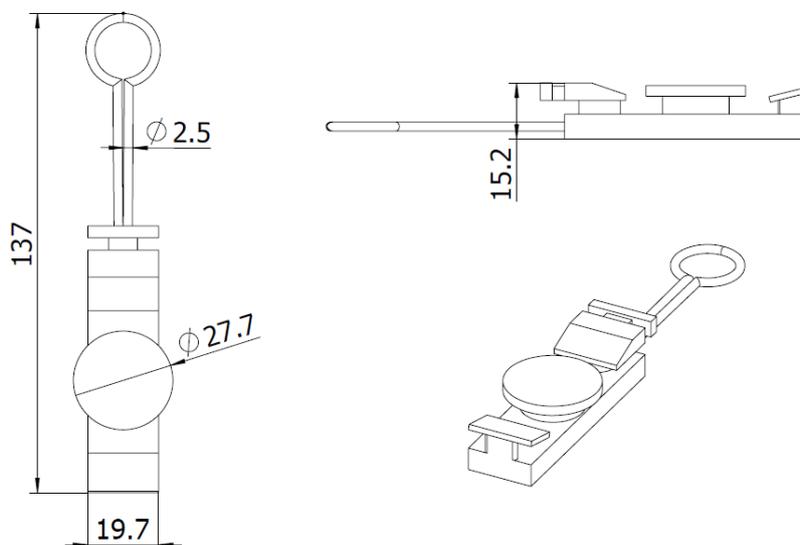

Proprietary information of SIGHTES TECHNOLOGY that may not be reproduced, disclosed or used for any purpose except under the authorized written consent of SIGHTES TECHNOLOGY and may be recalled at any time. Copyright 2022 SIGHTES TECHNOLOGY. All Rights Reserved Sep 1 2023