


Preformed Tension Clamp for ADSS, Galvanized Steel

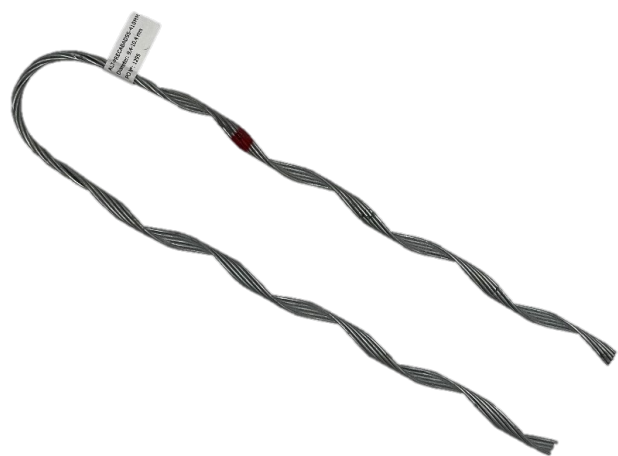


Features

- Applies directly to the surface of the drop cable without damaging the cable jacket or causing fiber attenuation that wedge-style clamps can cause
- Resistant to high temperatures, humidity, oxidation, and saline environments
- Easy installation without special tools or equipment

Specifications

Material	Galvanized steel
Zinc Coating	ASTM A641, Class 3
Salt Spray Test	1,000 hours Min. (ASTM B117)
Grip Strength	Min. 75% RTS
Color Code	Customized

Part #	PG-FWS410-94T104	PG-FWS900-106T116	PG-FWS1350-125T139	PG-FWS1450-147T163
Cable Size	9.4-10.4mm	10.6-11.6mm	12.5-13.9mm	14.7-16.3mm
RTS, KN	4	6	6	10
Φ, mm	60	60	60	60
L, mm	410	900	1,350	1,450
L1, mm	290	730	1,165	1,265
D, mm	20	20	20	20

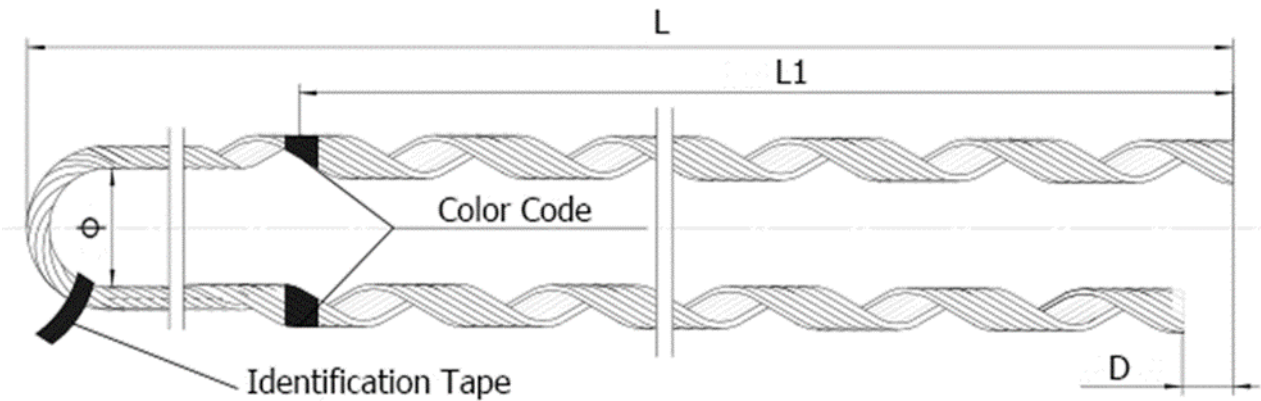

FOTUX is capable of providing customized designs based on cable size and RTS data.