


ADSS Cable Suspension Grip, Aluminum Alloy

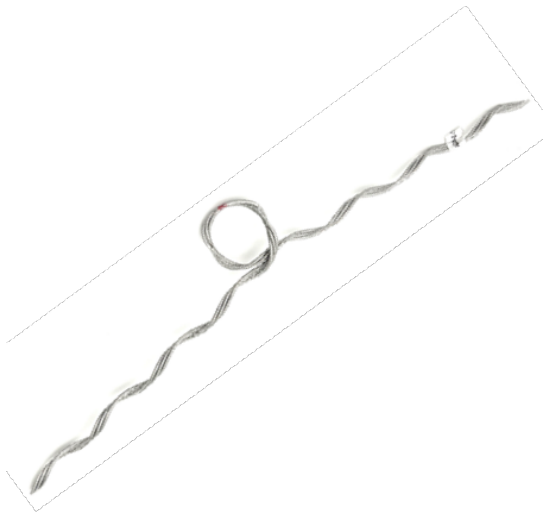


Features

- Reduces pole space by using a standard and an elongated tangent support on a single J-hook to support multiple cables
- Made of corrosion-resistant material
- Easy installation without special tools or equipment

Specifications

Material	Aluminum Alloy
Salt Spray Test	1,000 hours Min. (ASTM B117)
Grip Strength	Min. 15% RTS
Color Code	Customized

Part #	PG-JWAA560-75T85	PG-JWAA745-96T106	PG-JWAA635-153T163	PG-JWAA635-199T209
Cable Size	7.5-8.5mm	9.6-10.6mm	15.3-16.3mm	19.9-20.9mm
RTS, KN	2.0	2.7	6.0	6.0
L, mm	560	745	635	635
D, mm	Ø3.5	Ø3.5	Ø2.5	Ø2.5
Rod, Qty	2	3	3	3

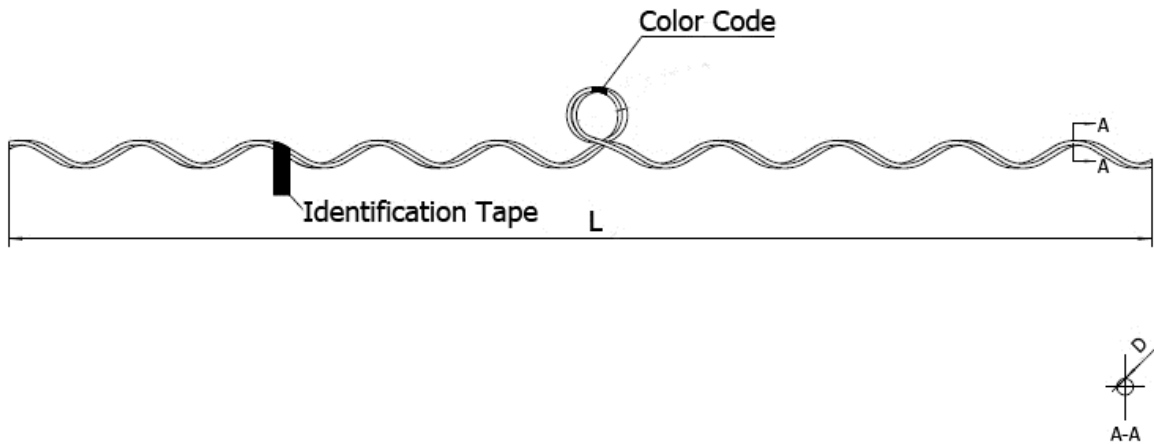

FOTUX is capable of providing customized designs based on cable size and RTS data.